



PRODUCT SUBMITTAL

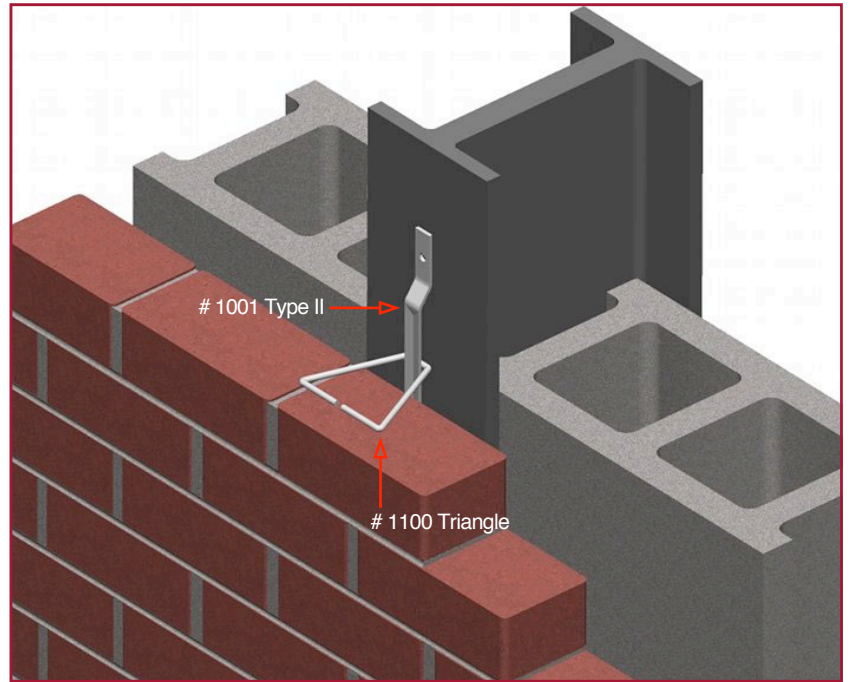

1001 Type II Anchor

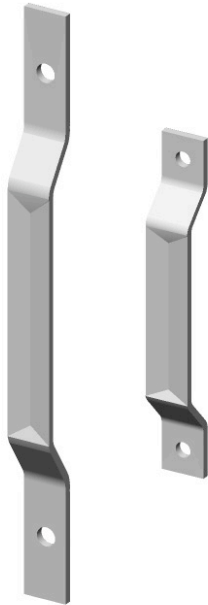

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

ASTM A82 / A82M - (Cold drawn steel wire)
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

Steel Products (flats):
Mill Galvanized & Hot Dip,
59.2% Post-Consumer
8.8% Post Industrial / Pre -
Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

WIRE Recycled Content:
Mill Galvanized & Hot Dip,
85% Post-Consumer
13% Post Industrial / Pre -
Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

1001 Type II Anchor: 12 gauge thick" x 3/4" wide

5" length 9" length

1100 Triangle:

3/16"Ø 1/4"Ø

3"x3" 4"x4" 5"x5" 6"x6" 7"x9" 9" x 9"

FINISH:

Mill Galvanized
 Hot Dip Galvanized
 Stainless Steel



Corporate Office: 400 Roundtree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113