


HOME COMPANY INFO PRODUCTS SPECS/CADS HOW TO ORDER CONTACT US LINKS CONTINUING EDUCATION FORUM

BLOK-FLASH TECHNICAL DATA & SIZES

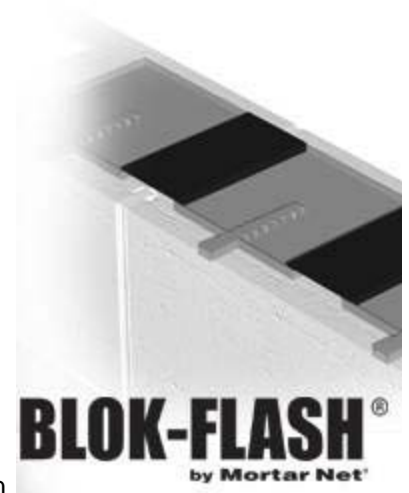

BLOK-FLASH® is a high-density polyethylene composition molded into a .0625 inch thick (1.59mm) flashing pan with .3125 inch (7.94 mm) perimeter flanges. The .0625 inch (1.59mm) concaved weep spout with a .20 inch (5.08mm) x .64 inch (16.26mm) opening and a 45 degree drip edge extends 1.0" (25.4mm) from the outer flange. The inner and outer flanges are spaced to allow for 1.0" of mortar bond between the upper and lower course of C.M.U. in 8", 10", or 12" wall systems. The weep spout ceiling extends 3.5" (88.9mm) from the outer flange into the center of the pan and acts to suspend mortar, keeping the weep channel clear. BLOK-FLASH® is impervious to water and includes chemical stabilizers to protect against UV degradation.

Standard Sizes

| | Model US-8 | Model US-10 | Model US-12 |
|--------------------|---------------------|---------------------|---------------------|
| C.M.U. Type | 8" (7-5/8") | 10" (9-5/8") | 12" (11-5/8") |
| Height | 3/16" (7.94mm) | 3/16" (7.94mm) | 3/16" (7.94mm) |
| Width | 5/16" (142.88mm) | 7/16" (193.68mm) | 9/16" (244.48mm) |
| Length | 6.75" (171.45mm) | 6.75" (171.45mm) | 6.75" (171.45mm) |

Units Per Carton (all models): 100 w/Bridge