

# TAMKO® NO.30 ASTM D 4869 Asphalt Saturated Organic Felt

PRODUCT DATA

Manufactured in Phillipsburg, KS

TAMKO® NO. 30 ASTM D 4869 SATURATED FELT features a tough TAMKO organic felt (non-perforated) that is saturated with a asphalt.



## USES

Accepted for use as an underlayment felt to be applied over the deck prior to the installation of TAMKO asphalt shingles.


## CERTIFICATIONS

Product No: **30002620**  
ASTM D 4869, Type III  
U.L. Prepared Roofing Accessory

Product No: **31001693**  
ASTM D 4869, Type I  
U.L. Prepared Roofing Accessory

## PRODUCT DATA\*

Roll Dimensions	72' X 36"
Coverage per roll	2 Squares
Laying Lines	2", 4", 17"
Rolls per pallet	20

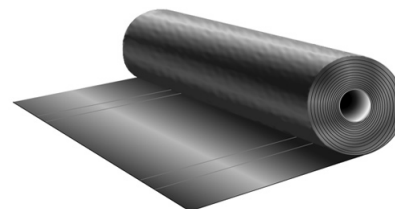

\*All values stated as nominal

THIS PRODUCT IS SOLD "AS IS" WITHOUT WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.



**CAUTION:** The National Institute for Occupational Safety and Health (NIOSH) has concluded that fumes of heated asphalt are a potential occupational carcinogen. Do not heat or burn this product.

**TAMKO®**  
**BUILDING PRODUCTS**

TAMKO® and Roofer Logo are registered trademarks of TAMKO® Building Products, Inc.

06/2011

Central District	220 West 4th St., Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr., Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St., Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp., Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave., Denver, CO	80216	800-530-8868

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at [tamko.com](http://tamko.com) or call us at 800-641-4691.