


# Light Forming Miscellaneous

## (1120) ST-19 PANEL LOCK TIE


The ST-19 Panel Lock Tie is used in conjunction with a Steel Wedge to quickly and securely lock adjacent form panel 2x4 studs together. The standard length is 3-1/2" with other lengths available on special order.

*To Order, Specify: quantity, type and length.*

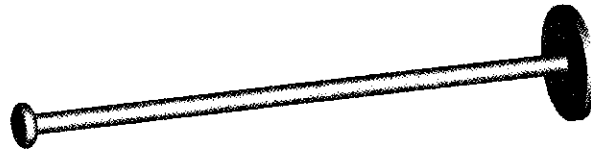

## (1130) RD-24 PENCIL ROD

The RD-24 Mild steel Pencil Rod is available in 1/4" diameter cut to 10', 20' or other specified length or in coils of approximately 600 feet (100 lbs.). 3/8" and 1/2" Pencil Rod are also available on special order.

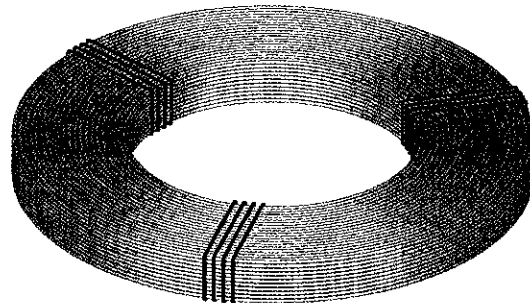


34 *To Order, Specify: quantity, type and diameter.*

## (1135) RC-22 FORM CLAMP


The RC-22 Form Clamp is designed for use with the Pencil Rod, above, or other similar mild steel bar. The clamp is available in three sizes to accept 1/4", 3/8" and 1/2" diameters. The Form Clamp is especially useful when unusual forming conditions exist, such as battered walls or walls of varying thickness.

The safe working load of the Form Clamp is dependent on the setscrew being properly tightened and the pencil rod being bent 90° at the back of the clamp.



SAFE WORKING LOAD			
NUMBER	TYPE	WIRE SIZE	SWL (lbs)
1	RC-22	1/4"	1,125
2	RC-22	3/8"	2,250
3	RC-22	1/2"	3,750

Safe working load is based on an approximate 2:1 safety factor.

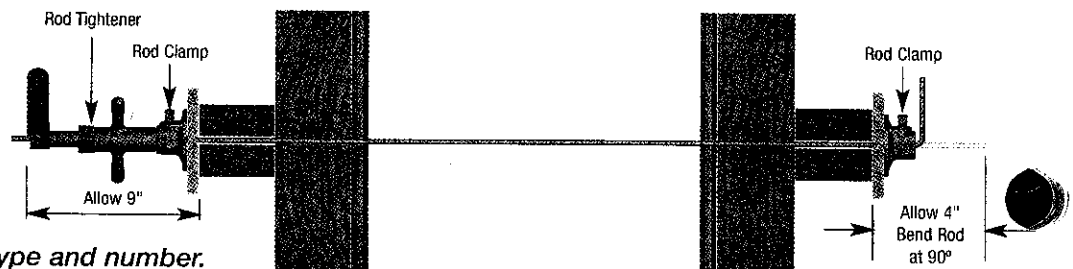

*To Order, Specify: quantity, type and number.*