


Rebar Positioners


Product Information/
Submittal Sheet

DUR-O-WAL® Rebar Positioners

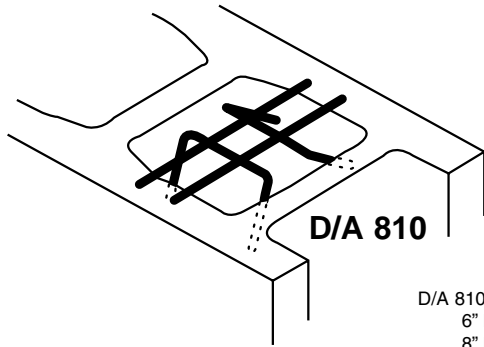


D/A 810

D/A 810 available for
6" block
8" block
10" block
12" block

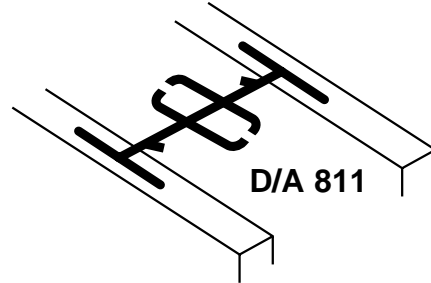


D/A 811

D/A 811 available for
8" block only

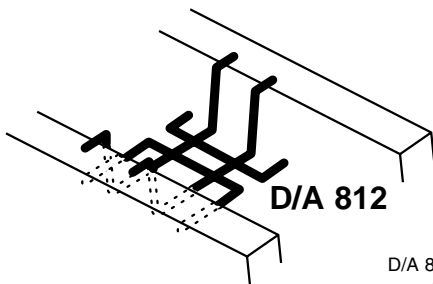


D/A 812

D/A 812 available for
6" block
8" block
10" block
12" block

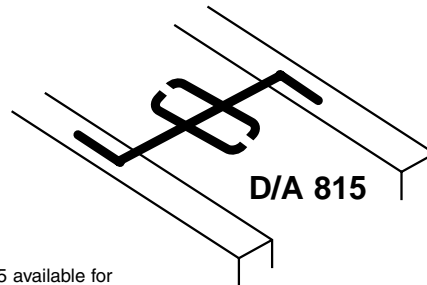


D/A 815

D/A 815 available for
6" block
8" block
10" block
12" block

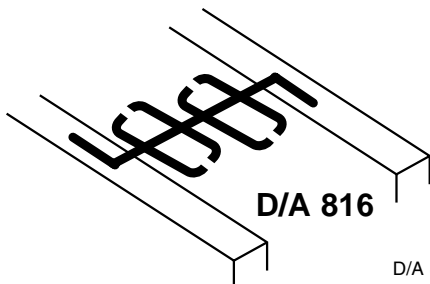

D/A 816

D/A 816 available for
8" block
10" block
12" block

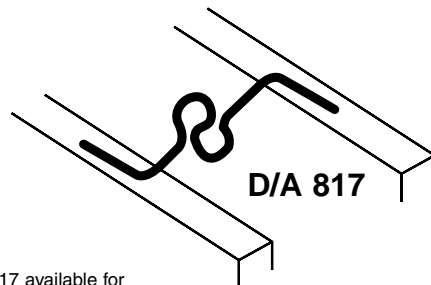

D/A 817

D/A 817 available for
8" block
10" block
12" block

Positioners are fabricated from 9 gage wire except D/A 811 is fabricated from 18 gage sheet steel.

Finishes:

- Mill Galvanized
- Hot Dip Galvanized



Positioners are located at top of first course and one course below top of wall with a maximum 192 vertical bar diameters. Allows bar position at center of wall or either side of core. Rebar positioners are required by ACI530 and UBC codes for reinforced masonry.

Customer Service

Aurora, IL (800) 323-0090 • Folcroft, PA (800) 368-2035 • Birmingham, AL (800) 821-9296 • Phoenix, AZ (800) 235-0024

Technical Service

www.dur-o-wal.com • Email: info@dur-o-wal.com • Fax-On-Demand: (800) 254-8958

Approval



Sales and Services Centers

625 Crane Street
Aurora, IL 60505
(800) 323-0090
Fax: (630) 898-1378

3 Horne Drive
Folcroft, PA 19032
(800) 368-2035
Fax: (610) 534-7206

1401 Meadowcraft Road
Birmingham, AL 35215
(800) 821-9296
Fax: (205) 856-0965

4810 South 40th Street, Suite 3
Phoenix, Arizona 85040
(800) 235-0024
Fax: 602-431-9667