

## PRODUCT DESCRIPTION


**RUFECO 2000B, 3000B and 4000B** are mono-layer membranes consisting of a very flexible, linear low-density polyethylene (LLDPE). LLDPE provides high elongation, tremendous tear resistance and bursting strength. A minimum carbon black content of 2.0% provides excellent protection from UV rays and harsh weather conditions. They do not contain plasticizers which can migrate to the surface, causing premature aging. Manufactured from virgin resins, **RUFECO 2000B, 3000B and 4000B** are designed to provide a high quality yet economical geomembrane.

## PRODUCT USE

**RUFECO 2000B, 3000B and 4000B** are used in applications that require excellent outdoor longevity and chemical resistance. These are very flexible materials that will conform to almost any surface. Rufco 3000B meets or exceeds ASTM E-1745, Class "A" standard as an underslab vapor retarder.

## SIZE & PACKAGING

**RUFECO 2000B** is available in 50,000 square foot panels and **RUFECO 3000B** in up to 33,000 square foot panels. **RUFECO 4000B** is available in up to 25,000 square foot panels. All panels are accordion folded and tightly rolled onto a heavy duty core for ease of handling and time saving installation.

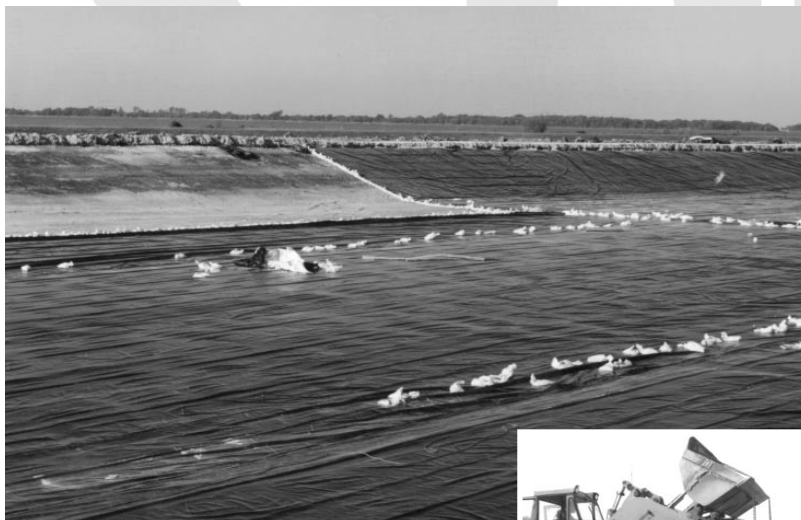

*Holding Pond*



*Large Factory Welded Panel*

PRODUCT	PART NUMBER
RUFECO 2000B .....	2000B
RUFECO 3000B .....	3000B
RUFECO 4000B .....	4000B

## COMMON APPLICATIONS

- Decorative Ponds
- Pond/Canal Liners
- Outdoor Covers
- Fire Ponds
- Remediation Liners
- Cargo Covers
- Vapor Retarders
- Brine Ponds
- Oil Field Pit Liners
- Silage Covers
- Mine Tailing Ponds
- Interim Landfill Caps
- Waste Water Ponds
- Golf Course Pond Liners
- Farm Ponds
- Leachate Collection Ponds

Properties	Test Method	RUFECO 2000B		RUFECO 3000B		RUFECO 4000B	
		Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages	Min. Roll Averages	Typical Roll Averages
Thickness mils (mm)	ASTM D 5199	20.0 (0.50)	21.0 (0.53)	30.0 (0.75)	31.2 (0.78)	40.0 (1.00)	41.5 (1.04)
Density g/cm <sup>3</sup>	ASTM D792 or ASTM D1505	0.920		0.920		0.920	
Minimum Tensile lbf/in. width (N/mm width)	ASTM D638 1. Tensile Strength at Break 2. % Elongation at Break	76 (13) 800	95 (17) 875	114 (20) 800	135 (24) 875	152 (27) 800	175 (21) 875
Hydrostatic Resistance psi (kPa)	ASTM D751	118 (814)	122 (841)	175 (1206)	180 (1241)	230 (1586)	250 (1724)
Puncture Resistance lbf (N)	ASTM D4833	30 (130)	39 (173)	45 (200)	52 (231)	60 (270)	65 (289)
Tear Resistance lbf (N)	ASTM D1004	11 (49)	13 (58)	16 (71)	19 (85)	22 (98)	26 (116)
Volatile Loss Method A	ASTM 1203		<1%		<1%		<1%
Resistance to Soil Burial (% change maximum in original value)	ASTM D3083 1. Tensile Strength at Yield 2. Tensile Strength at Break 3. Elongation at Yield 4. Elongation at Break 5. Modulus of Elasticity		±10%		±10%		±10%
Low Temp, Impact Failure Temp F (C)	ASTM D746		< -94 (< -70)		< -94 (< -70)		< -94 (< -70)
Dimensional Stability % Change	ASTM D1204		< 2		< 2		< 2
Environmental Stress Crack Resistance Hours to failure	ASTM D5397 Appendix A		> 400		> 400		> 400
Carbon Black %	ASTM D1603 or D4218	2.0	2.5	2.0	2.5	2.0	2.5
Perms grains/ft <sup>2</sup> /hr/in. Hg (grams/m <sup>2</sup> /day/mm Hg)	ASTM E96 Method A 73° F, 50% RH		0.045 (0.030)		0.029 (0.019)		0.022 (0.014)
<b>FACTORY SEAM REQUIREMENTS</b>							
Bonded Seam Strength lbf/in. width (N/cm width)	ASTM D4545 Mod.*	40 (70)	45 (79)	60 (105)	68 (119)	75 (131)	80 (140)
Seam Peel Adhesion lbf/in. width (N/cm width)	ASTM D4545 Mod.*	30 (53)	36 (63)	45 (79)	53 (93)	60 (105)	69 (121)

Nominal Weight /Thousand Square Feet: RUFECO 2000B - 105 lbs., RUFECO 3000B - 157 lbs., RUFECO 4000B - 210 lbs.

\* Raven Industries performs seam testing at 12" per minute.

Rufco 3000B meets or exceeds ASTM E-1745, Class "A" standard for water vapor retarders used in contact with soil or granular fill under concrete slabs.

Note: To the best of our knowledge, these are typical property values and are intended as guides only, not as specification limits. RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.