



Stego® Tape

STEGO INDUSTRIES, LLC



Vapor Retarders
07260, 03300

1. Product Name

Stego Tape

2. Manufacturer

Stego Industries, LLC
27442 Calle Arroyo, Suite A
San Juan Capistrano, CA 92675
Sales, Technical Assistance
Ph: (877) 464-7834
Fx: (949) 493-5165
www.stegoindustries.com

3. Product Description

USES: Stego Tape is a low permeance tape designed for protective sealing, hanging, seaming, splicing, and patching applications where a highly conformable material is required. It has been engineered to bond specifically to Stego Wrap Vapor Retarder/Barrier, making it ideal for sealing Stego Wrap seams and penetrations.

COMPOSITION: Stego Tape is composed of a high-density polyethylene film and a rubber-based, pressure-sensitive adhesive.
SIZE: Stego Tape comes in 4" wide, 180 ft. long rolls. Stego Tape ships 12 rolls in a case.

4. Technical Data

APPLICABLE STANDARDS

American Society for Testing & Materials (ASTM)

- ASTM D 1000 Standard Test Method for Pressure-Sensitive Adhesive-Coated Tapes Used for Electrical and Electronic Applications
- ASTM E 1643 Standard Practice for Installation of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs

5. Installation

SEAMS:


Overlap Stego Wrap 6 inches and seal with Stego Tape. Make sure the area of adhesion is free from dust, dirt and moisture to allow maximum adhesion of the pressure sensitive tape.

PIPE BOOTS:

- 1) Cut a piece of Stego Wrap.
Width: minimum 12"
Length: 1 1/2 times the pipe circumference
- 2) With scissors, cut slits half the width of the film.
- 3) Wrap boot around pipe and tape onto pipe, completely taping the base to Stego Wrap using Stego Tape.

Stego Tape should be installed above 40 °F

Note: See Stego's installation instructions for complete instructions and detailed drawings. Each user should make their own tests to determine the products

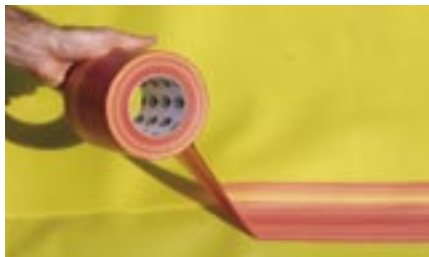

suitability for their own intended use and shall assume all risks and liability in connection therewith.

6. Availability & Cost

Stego Tape is available nationally via building supply distributors. For current cost information, contact your local Stego distributor or Stego Industries' sales department.

7. Warranty

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided and disclaims all liability from any loss or damage. No warranty, express or implied, is given as to the merchantability, fitness for a particular purpose, or otherwise with respect to the products referred to.

8. Maintenance

None required.

9. Technical Services

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries' technical assistance department or by visiting the website: www.stegoindustries.com

10. Filing Systems

- Stego Industries' website

TABLE 1: PHYSICAL PROPERTIES OF STEGO TAPE

Property	Stego Tape
Total Thickness	9 mils
Permeance	0.23 perms
Tensile Strength	25 lbs./in. width
Elongation (at break)	100%
Adhesion	90-oz./in.
Ultraviolet Resistance	Excellent

