

# PRODUCT SUBMITTAL

WIRE-BOND

®

## Type III-X Anchor




### Description:

WIRE-BOND®'s Type III-X Anchor installs quickly and easily on exterior walls with brick veneer while providing positive contact with metal studs. It transfers compression loads to the steel stud backup. Available in 14 gauge and 12 gauge (plate). Finishes include mill galvanized, hot dip galvanized, and stainless steel.

The Type III-X Anchor, with 3/16" adjustable tie, meets the Brick Institute of America's requirement of a maximum deflection of less than .05 inches (1.2 mm) when tested at an axial load of 100 pounds in tension and compression. Prongs on the anchors are available in lengths to accommodate 1", 1-1/2", 2", and 2-1/2" insulation, as well as 1/2" and 5/8" wallboard.

### Anchorseal

Anchorseal is a 40 mil thick dual barrier membrane, 3" wide, consisting of 32 mils of pliable highly adhesive, rubberized asphalt, completely and integrally bonded to an 8 mil, high density, cross-laminated polyethylene film. It automatically seals around the shaft of the screw and prongs of the Type III-X anchor during installation.

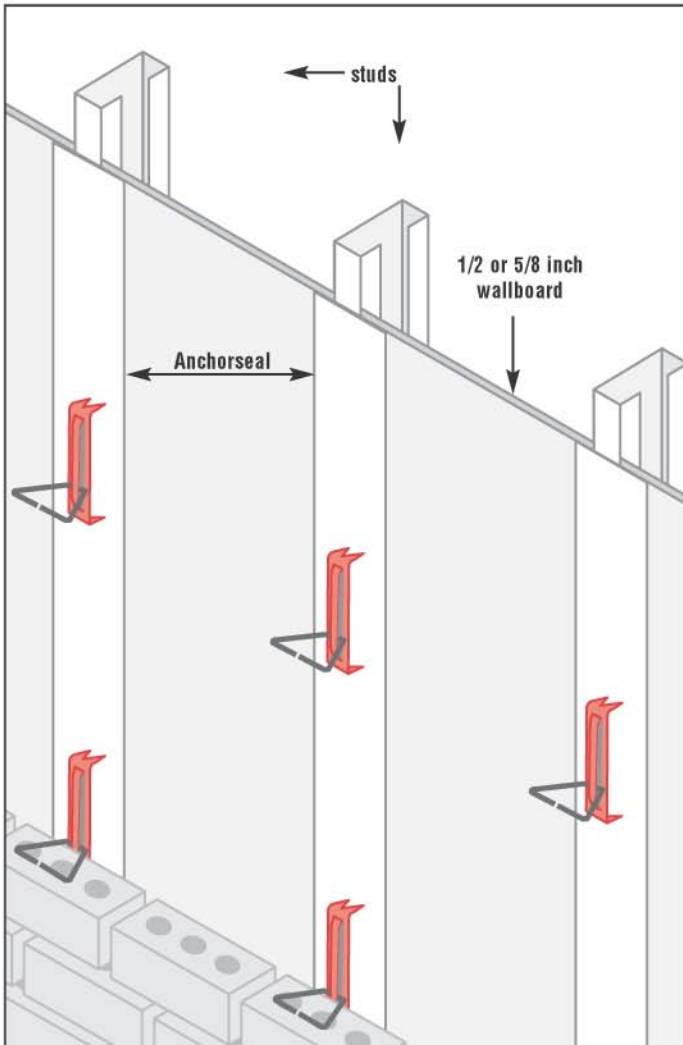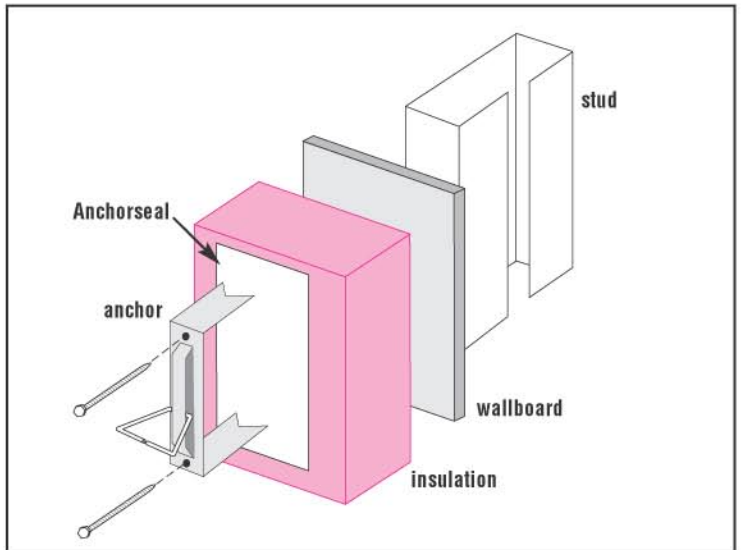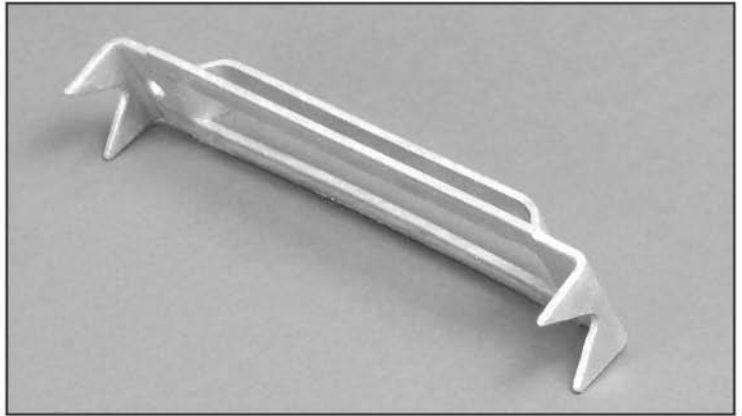

Approvals:

Comments:

### Corporate Office

400 Roundtree Road PO Box 240988 Charlotte, NC 28224  
704 525.5554 800 849.6722 Fax 704 525.3761

### Memphis Plant

2365 Harbor Avenue PO Box 13124 Memphis, TN 38113  
901 775.9444 800 441.8359 Fax 901 775.9449

[www.wirebond.com](http://www.wirebond.com)