


H^B DW-10 Series Veneer Anchors

DW-10HS[®] ANCHOR SYSTEM

04082/HOH
BuyLine 1823

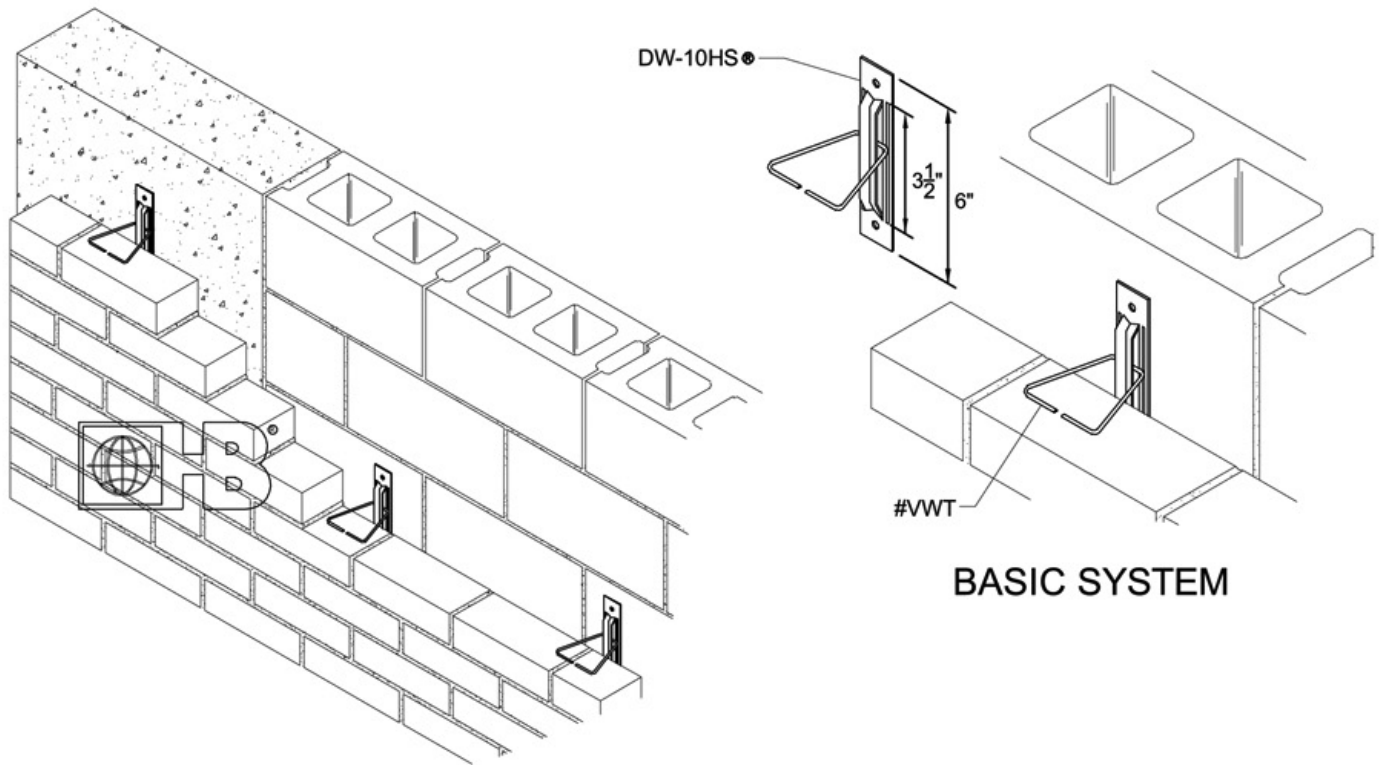

BASIC SYSTEM

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:
Tensile strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating:
Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

SHEET METAL (Carbon Steel):

ASTM A 366
Zinc Coating:
ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

SHEET METAL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).
Note: H&B recommends Stainless Steel for maximum protection against corrosion.

THICKNESS:

- 14 Gauge
- 12 Gauge

VEE TIE DIAMETER:

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

VEE TIE LENGTH:

- 3" 3 1/2" 4" 4 1/2" 5"
- OTHER LENGTH _____

FINISH:

- Hot Dip Galvanized
- Stainless Steel



Hohmann & Barnard, Inc.
30 Rasons Court
Hauppauge, New York 11788
TEL: (800) 645-0616 FAX: (631) 234-0683

WEBSITE: www.h-b.com
E-MAIL: weanchor@h-b.com


© HOHMANN & BARNARD, INC. - 1999



DW-10 Series Veneer Anchors

DW-10HS® ANCHOR SYSTEM

04082/HOB
BuyLine 1823

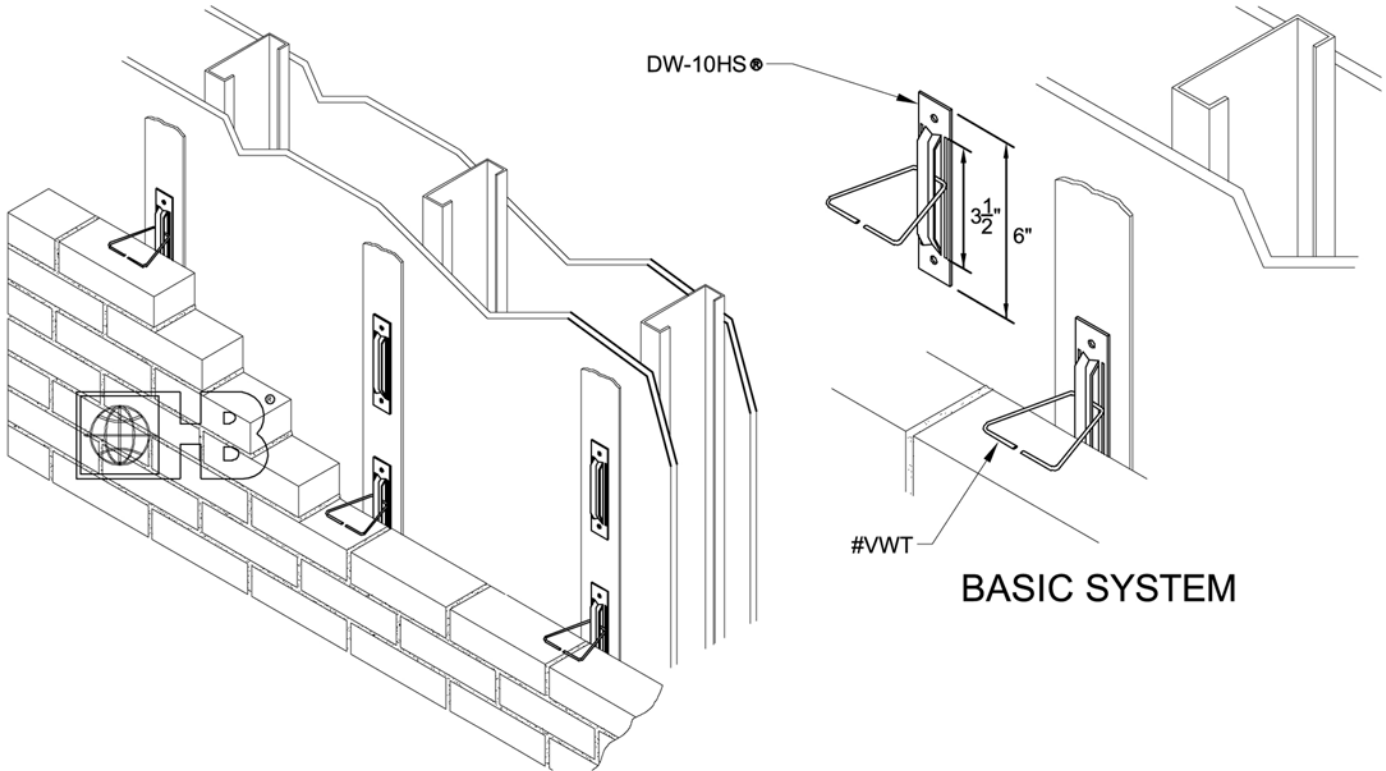

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:
Tensile strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating:
Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

SHEET METAL (Carbon Steel):

ASTM A 366
Zinc Coating:
ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication).
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ff

SHEET METAL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors) (Type 316 available on special order).
Note: H&B recommends Stainless Steel for maximum protection against corrosion.

THICKNESS:

- 14 Gauge
- 12 Gauge

VEE TIE DIAMETER:

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

VEE TIE LENGTH:

- 3" 3 1/2" 4" 4 1/2" 5"
- OTHER LENGTH _____

FINISH:

- Hot Dip Galvanized
- Stainless Steel

We Anchor The World



Hohmann & Barnard, Inc.
30 Rasons Court
Hauppauge, New York 11788
TEL: (800) 645-0616 FAX: (631) 234-0683

WEBSITE: www.h-b.com
E-MAIL: weanchor@h-b.com

© HOHMANN & BARNARD, INC. - 1999