




Veneer Anchors

HB-200 Adjustable Veneer Anchor

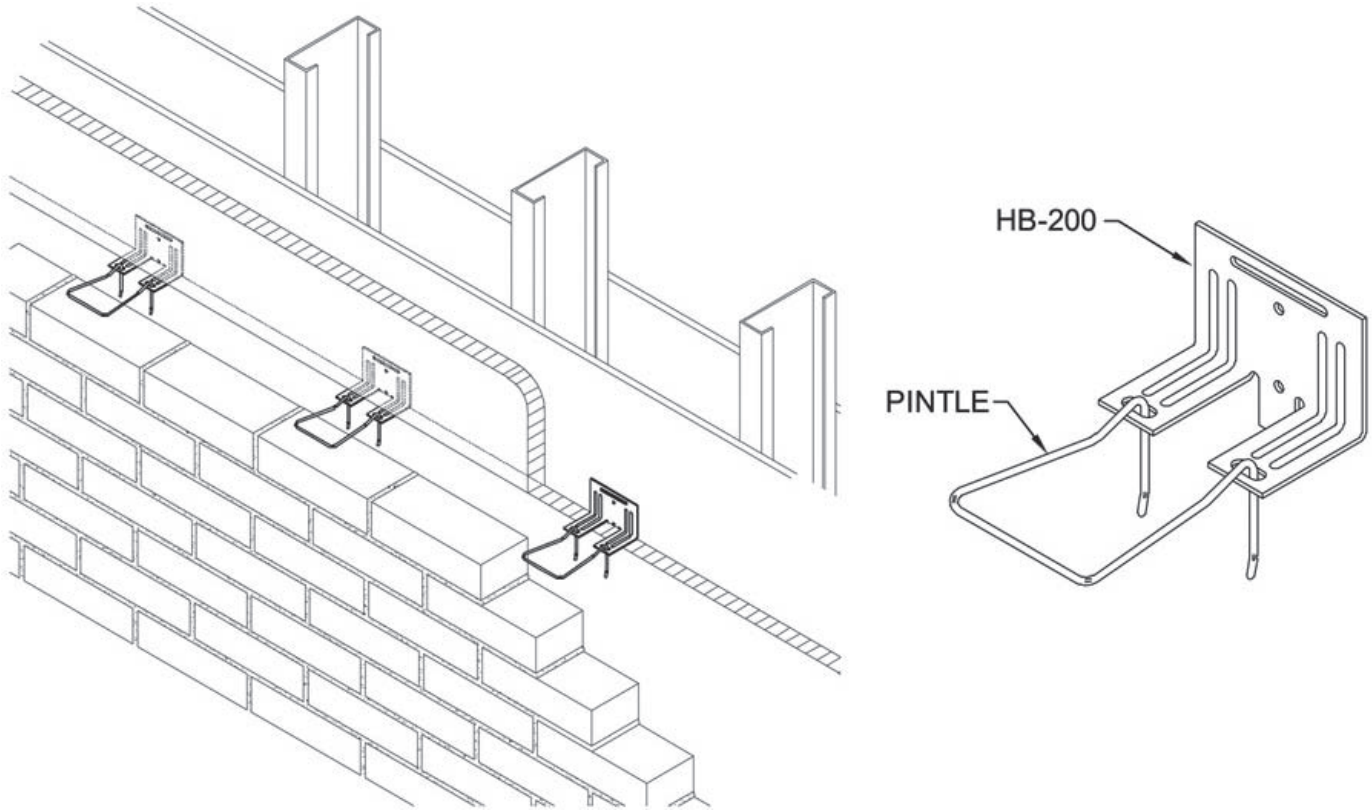

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

MATERIAL CONFORMANCE

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A82/A82M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum
Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B** (1.5 oz/ft²)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Wire (Stainless Steel): **ASTM A580/A580M** - AISI Type 304 (Type 316 available on special order)

Sheet Metal (Carbon Steel): **ASTM A1008/A1008M**

Zinc Coating:
Hot-Dip Galvanized: **ASTM A153/A153M Class B** (1.5 oz/ft²)
(sheet metal ties and anchors galvanized after fabrication)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel): **ASTM A 666, ASTM A480, ASTM A240/A240M, and ASTM A167 - AISI Type 304** (Type 316 available on special order)

Finish:

- Hot-Dip Galvanized
 Stainless Steel

Backplate Style (Equal to thickness of insulation):

- | | |
|--|--|
| <input type="checkbox"/> HB-200 (0") | <input type="checkbox"/> HB-200 (3 1/2") |
| <input type="checkbox"/> HB-200 (1") | <input type="checkbox"/> HB-200 (4") |
| <input type="checkbox"/> HB-200 (1 1/2") | <input type="checkbox"/> HB-200 (4 1/2") |
| <input type="checkbox"/> HB-200 (2") | <input type="checkbox"/> HB-200 (5") |
| <input type="checkbox"/> HB-200 (2 1/2") | <input type="checkbox"/> HB-200 (5 1/2") |
| <input type="checkbox"/> HB-200 (3") | <input type="checkbox"/> HB-200 (6") |

Backplate Thickness: 14 ga. 12 ga.

3/16"Ø Pintle Length:

- | | | |
|---------------------------------|--------------------------------------|---------------------------------|
| <input type="checkbox"/> 3" | <input type="checkbox"/> 4" | <input type="checkbox"/> 4 3/4" |
| <input type="checkbox"/> 5 1/4" | <input type="checkbox"/> Other _____ | |