



# STEGO® WRAP 10-MIL CLASS A VAPOR RETARDER


A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: MAR 3, 2022

## 1. PRODUCT NAME

**STEGO WRAP 10-MIL CLASS A VAPOR RETARDER**

## 2. MANUFACTURER

Stego Industries, LLC  
 216 Avenida Fabricante, Suite 101  
 San Clemente, CA 92672  
 Sales, Technical Assistance  
 Ph: (877) 464-7834  
 contact@stegoindustries.com  
**stegoindustries.com**

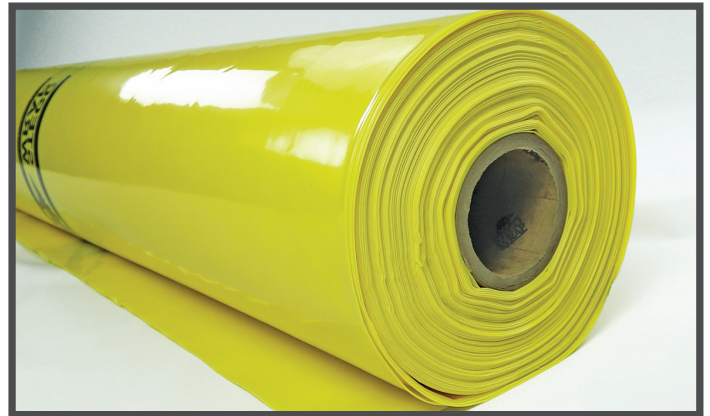

## 3. PRODUCT DESCRIPTION

USES: Stego Wrap Class A is used as an exceptional vapor retarder.

COMPOSITION: Stego Wrap Class A is a multi-layer plastic extrusion manufactured with only high grade prime, virgin, polyolefin resins.

ENVIRONMENTAL FACTORS: Stego Wrap Class A can be used in systems for the control of soil gases (radon, methane), soil poisons (oil by-products) and sulfates.

## 4. TECHNICAL DATA

**TABLE 1: PHYSICAL PROPERTIES OF STEGO WRAP 10-MIL CLASS A VAPOR RETARDER**

PROPERTY	TEST	RESULTS
Under Slab Vapor Retarders	ASTM E1745 Class A, B & C – Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs	Exceeds Class A, B & C
Water Vapor Permeance	ASTM F1249 – Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor	0.0254 perms
Permeance After Conditioning (ASTM E1745 Sections 7.1.2 - 7.1.5)	ASTM E154 Section 8, F1249 – Permeance after wetting, drying, and soaking ASTM E154 Section 11, F1249 – Permeance after heat conditioning ASTM E154 Section 12, F1249 – Permeance after low temperature conditioning ASTM E154 Section 13, F1249 – Permeance after soil organism exposure	0.0258 perms 0.0259 perms 0.0241 perms 0.0245 perms
Puncture Resistance	ASTM D1709 – Test Method for Impact Resistance of Plastic Film by Free-Falling Dart Method	3,006 grams
Tensile Strength	ASTM D882 – Test Method for Tensile Properties of Thin Plastic Sheeting	50.6 lbf/in
Thickness		10 mil
Roll Dimensions		width x length: area: 14' x 210' 2,940 ft <sup>2</sup>
Roll Weight		140 lb

Note: perm unit = grains/(ft<sup>2</sup>\*hr\*in-Hg)

# STEGO® WRAP 10-MIL CLASS A VAPOR RETARDER

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: MAR 3, 2022

## 5. INSTALLATION

**UNDER SLAB:** Unroll Stego Wrap Class A over an aggregate, sand or tamped earth base. Overlap all seams a minimum of 6 inches and tape using Stego® Tape or Stego® Crete Claw® Tape. All penetrations must be sealed using a combination of Stego Wrap Class A and Stego Accessories.

For additional information, please refer to Stego's complete installation instructions.

## 6. AVAILABILITY & COST

Stego Wrap Class A is available through our network of building supply distributors. For current cost information, contact your local Stego distributor or Stego Industries' Sales Representative.

## 7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided herein. Stego Industries, LLC does offer a limited warranty on Stego Wrap. Please see [stegoindustries.com/legal](https://stegoindustries.com/legal)

## 8. MAINTENANCE

None required.

## 9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

**Email:** [contact@stegoindustries.com](mailto:contact@stegoindustries.com)

**Contact Number:** (877) 464-7834

**Website:** [stegoindustries.com](https://stegoindustries.com)

## 10. FILING SYSTEMS: [stegoindustries.com](https://stegoindustries.com)



(877) 464-7834 | [stegoindustries.com](https://stegoindustries.com)

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT [STEGOINDUSTRIES.COM](https://stegoindustries.com)